

Turnout Specifications

- Frog angle: #6, 9.527°
- Turnout length: 5.944"
- Track centerline radius: 24.8"
- Tie width: .063" (proto 10")
- Tie thickness: .056" (proto 9")
- Tie lengths: .675" to 1.312" (proto 9' to 17'-6")
- Tie spacing: .141" (proto 22.6")
- Switch point throw: .050"

TURNOUT TEMPLATES


For Micro Engineering N scale #6 Turnouts

 15-405
 N Code 70 #6 LH
 15-505
 N Code 55 #6 LH

 15-406
 N Code 70 #6 RH
 15-506
 N Code 55 #6 RH

 Scale: Actual size, but may not print to exact size.
 15-506
 N Code 55 #6 RH

Micro Engineering, Inc. 1120 Eagle Road Fenton, MO 63026 800-462-6975 www.microengineering.com

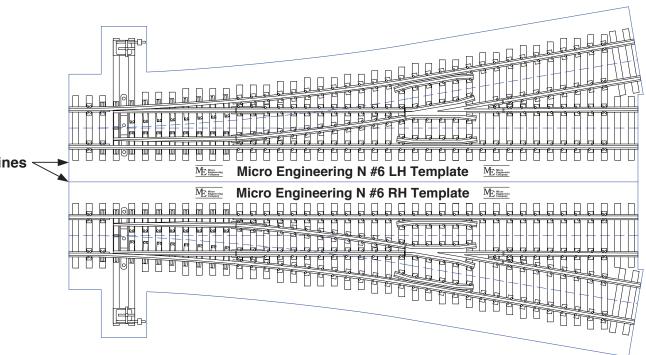

Notes

- Templates are on 1-1/8" track centers.
- Turnouts have a sprung switch rail assembly.
- Turnouts are DCC compatible.

Cut out templates on lines ¬

Printing instructions

• This is an Adobe .pdf document and requires a program that can open and print pdf files such as Adobe Acrobat or Adobe Reader.

• Print this template on **letter size** paper (8½" x 11") in "Landscape" layout.

• Turn off all page scaling and fitting options.

• Although the drawings are actual size, they may not print to exact size depending on the specific printer and printer settings.

• After printing, confirm the size of your template with a ruler.