

TURNOUT TEMPLATES

For Micro Engineering HOn3 #6 Turnouts

#15-105 HOn3 Code 70 #6 LH #15-106 HOn3 Code 70 #6 RH

Scale: Actual size, but may not print to exact size.


Turnout Specifications

- Frog angle: #6, 9.527°
- Turnout length: 7.532"
- Track centerline radius: 19.5"
- Tie width: .086" (proto 7.5")
- Tie thickness: .063" (proto 5.5")
- Tie lengths: .933" - 1.705" (proto 6'-9" to 12'-5")
- Tie spacing: .243" (proto 21")
- Switch point throw: .065"

Notes

- Templates are on 1-13/16" track centers.
- Turnouts have a sprung switch rail assembly.
- Turnouts are DCC compatible.

Cut out templates on lines

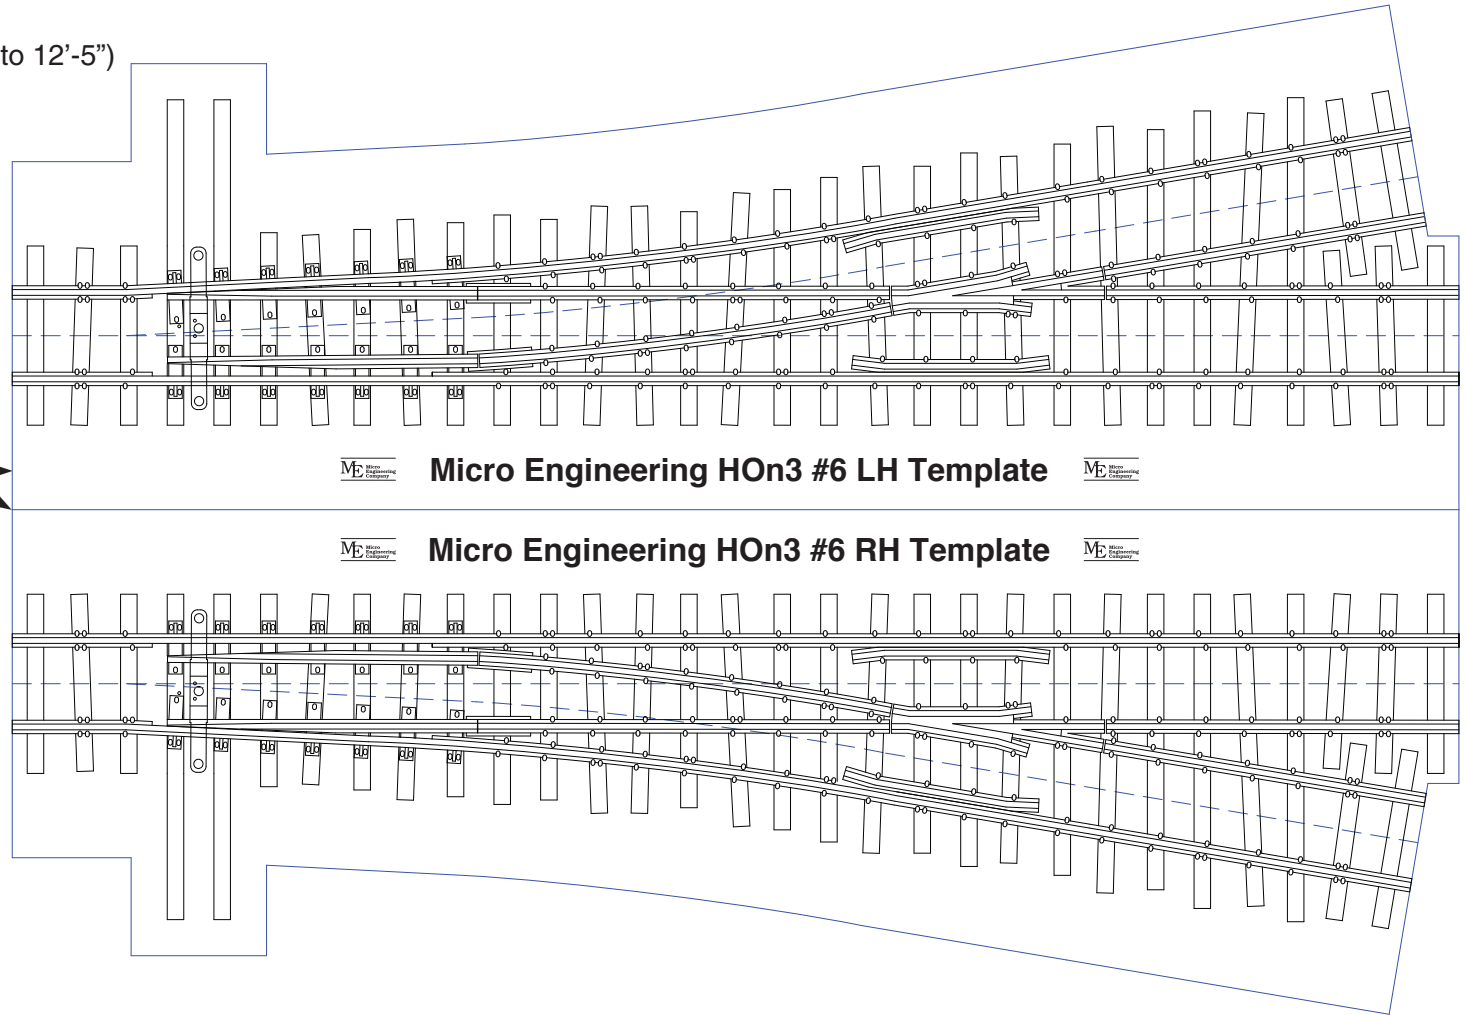

Printing instructions

- This is an Adobe .pdf document and requires a program that can open and print pdf files such as Adobe Acrobat or Adobe Reader.
- Print this template on **letter size** paper (8½" x 11") in "Landscape" layout.
- Turn off all page scaling and fitting options.
- Although the drawings are actual size, they may not print to exact size depending on the specific printer and printer settings.
- After printing, confirm the size of your template with a ruler.